

# **PRIMEWELL**



## **Commercial Truck and Bus Product Guide 2022-2023**

# Why PRIMEWELL Tires?

**PRIMEWELL** takes pride in being at the forefront of new technology, constantly seeking new ways to improve the driving experience. These advances are made while always keeping the needs of various types of drivers in mind. Only after thorough research, analysis, and testing, the tires are developed for local markets depending on their specific conditions and requirements.

**PRIMEWELL** is fully committed to maintaining the very highest standard of quality control procedures and has obtained ISO9001:2000 and ISO/TS16949:2009 accreditation for all manufacturing plants. In addition, the facilities have also obtained ISO14001-2004 Environmental Management System Accreditation.

All tires produced by **PRIMEWELL** are designed to meet or exceed the standards for all legal directives, regulations and standards. E-mark Safety and Noise Certification tests are performed and accredited by top level global and local organizations.

**PRIMEWELL's** research and development efforts have enabled the development of high quality global tires, and have also helped improve product design and production technology in maintaining a leading market position. In addition to in-house research and development capabilities, **PRIMEWELL** also collaborates with various leading universities and top research institutions, including the National Quality Examination Centre for Rubber Tire, Smithers Research Laboratories in the USA, and TUV Automotive GmbH Tire/Wheel Test Centre in Germany.

**PRIMEWELL** has also made a significant investment in its own tire testing facility, the European Technical Centre (ETC), which is located at the internationally acclaimed MIRA Ltd. (Motor Industry Research Association). The ETC provides development and evaluation capacity to **PRIMEWELL's** Research and Development Centre. The facility focuses on the development of quality tire products for worldwide applications in both the replacement and original equipment markets.







## R&D Centers at a Glance

### Locations:

- European Technical Center in UK
- European R&D Center in Hannover, Germany
- North American R&D Center in Ohio, USA
- China R&D Center
- Indonesia R&D Center


A team of over 600 experienced R&D engineers in five cutting-edge facilities and top quality equipment ensure the upmost quality of tire production and delivery. Apart from conducting our own research and development, we also collaborate with leading universities and research institutes around the world.

# Strong R&D Capabilities

## Our higher purpose: To make world-class quality tires


We are consistently looking for new ways in every aspect of design and development to make our customers' journey to wherever they need to go as enjoyable as possible.

Our mission is much more than just the products that we make. It is what defines us, unites us, and inspires us to make a difference every day: in our company, our community, and our world.

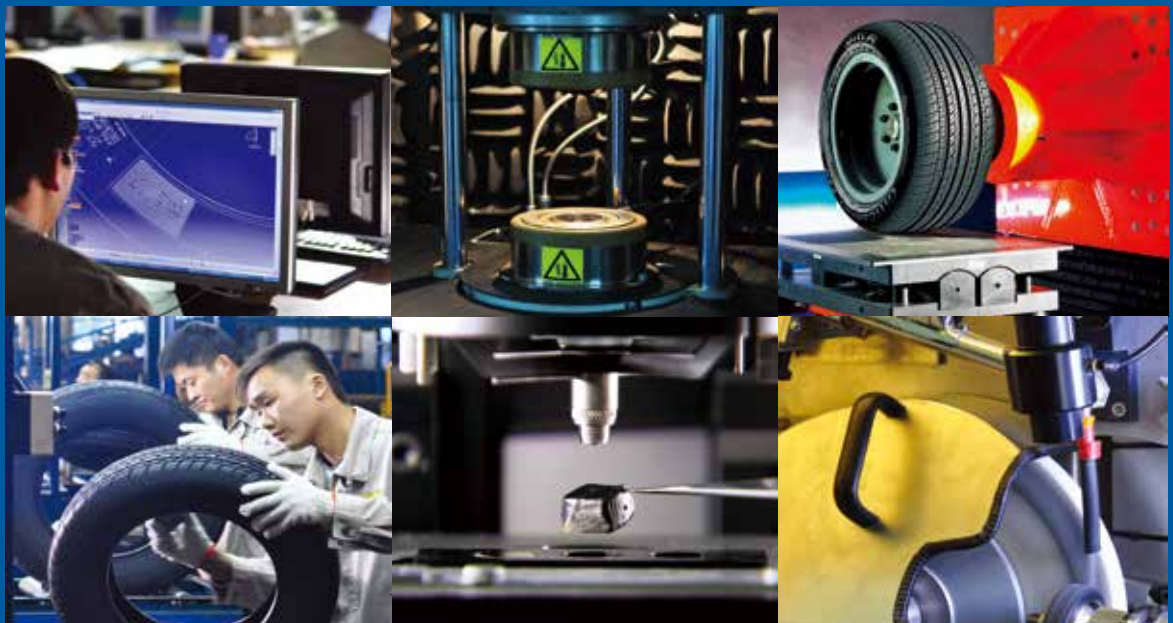



## Equal Force Carcass

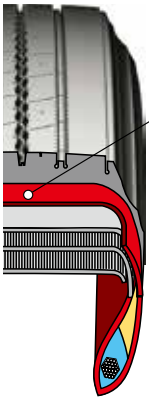

EFC is PRIMEWELL Tire's specially designed carcass technology enabling an optimal tire footprint and equal force distribution resulting in both better control and regular tread wear.

Improved regular wear means higher removal mileage



Better control and less noise




## Cap & Base Tread design

Cap layer provides wear resistant qualities and the base rubber between the top layer and the casing includes a special cooler running formulation insulating casing from heat build up.



Cap (top) layer has wear and irregular wear-resistant qualities




Base is cool-running, insulates casing from heat

Advanced design delivers higher mileage performance, increased retreadability and improved reliability



## DUO FILLER


is the combination of two bead fillers: Hard and Soft

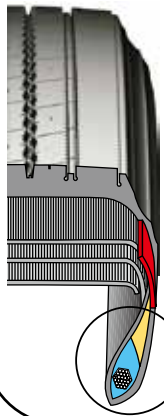

Soft Bead filler helps provide a more comfortable ride and smoother handling




Hard Bead Filler is stiff for better durability



## Stone Ejector

Stone Ejector prevents stone trapping in the grooves and reduces the risk of penetration into the tire belts, which can cause rust inside the tire construction and significantly reduce tire performance.

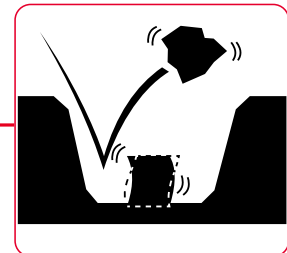

## Sidewall Protection Rib



Improved casing life expectancy through increased resistance to road hazards



OPEN AREA



Ex-Depth Solid Shoulder increased volume on the shoulder area resulting in more even wear especially on long haul applications.


Ex-Depth Open Shoulder allows greater traction and improved resistance to heel and toe wear.







# TIRE APPLICATIONS

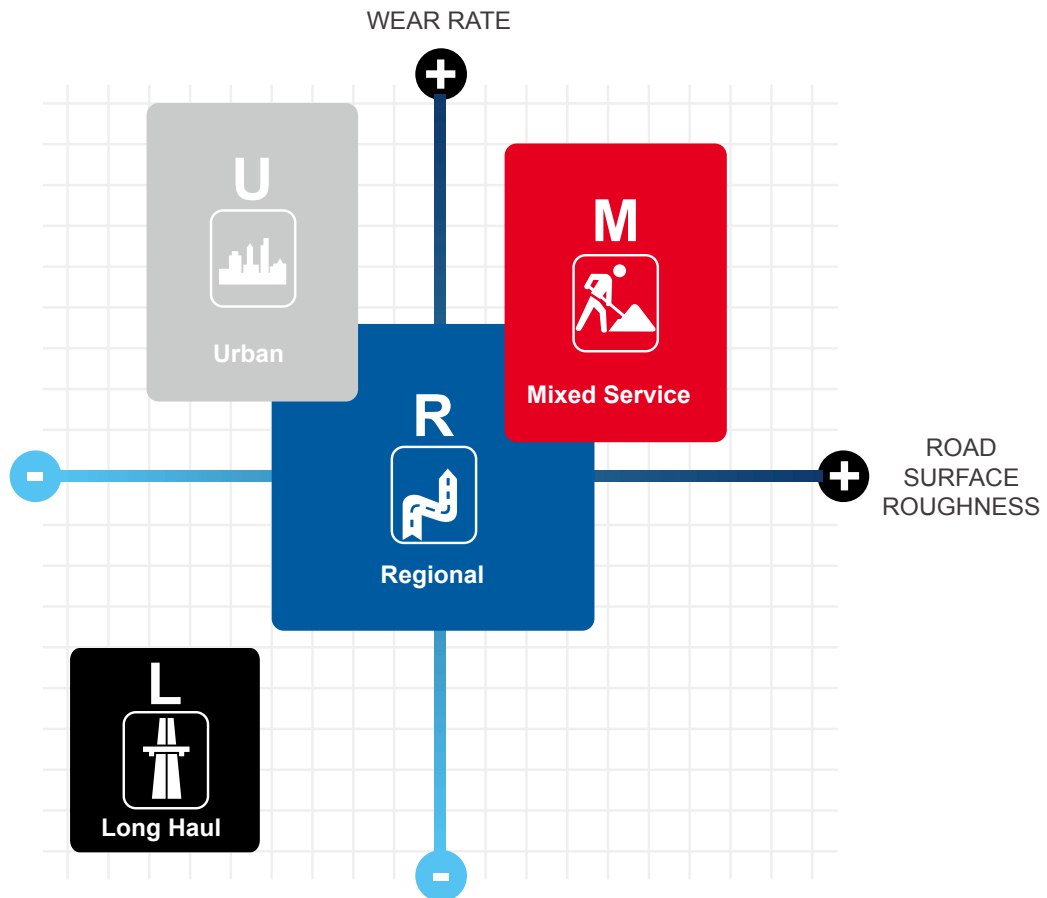Tires designed and developed for specific application requirements

Using the latest design and manufacturing technology PRIMEWELL Tire has developed a range of Mission Matched tires to meet the ever increasing demands of today's transport operations.



 <p>Long Haul</p>	<p><b>Long Haul Operation:</b></p> <ul style="list-style-type: none"> <li>• Interstate and Highway</li> <li>• Long distance routes</li> <li>• Constant speeds with minimal braking and accelerating</li> <li>• Well paved road conditions</li> </ul>	 <p>Mixed Service</p>	<p><b>Mixed Service Operation:</b></p> <ul style="list-style-type: none"> <li>• Frequent use both on and off road</li> <li>• Heavy Loads</li> <li>• Construction</li> </ul>
 <p>Regional</p>	<p><b>Regional Operation:</b></p> <ul style="list-style-type: none"> <li>• Regional highways and city streets</li> <li>• Flexible in a variety of applications</li> <li>• Frequent braking, acceleration and turning</li> <li>• Mainly on paved road, occasional use on unpaved road conditions</li> </ul>	 <p>Urban Road</p>	<p><b>Urban Operation:</b></p> <ul style="list-style-type: none"> <li>• Constant stop and go operating conditions</li> <li>• Frequent speed changes and turning</li> <li>• Increased risk of damage from curbing impacts</li> </ul>

Long Haul



Regional



**PDL336+**



**PTL711**



**PSR125**



**PSR239**



**PW215  
PW215N**



**PDR665**



**PTL719**



**PAL556  
PAL556+**



**PW602**



**PW622+**



**PTR721**



**PTR723**



**PAL517**



**PAL516+**



**PAR558**



**PAR560**



**PAR559  
PAR559+**

Steer/All Position (optional)

Drive

Trailer



Mixed Service



Off Road



Urban



**PDM331**



**PDM685**



**PW605**



**PDM608**



**PDM325 ★**



**PAU561**



**PDM693**



**PAM531**



**PAM872**



**PAM885**



**PW01**



**PAM539  
PAM539 ★**



**PAM533**



**PAO551**



**PAO530**




**PW825+**



**PAO829**



# Long Haul

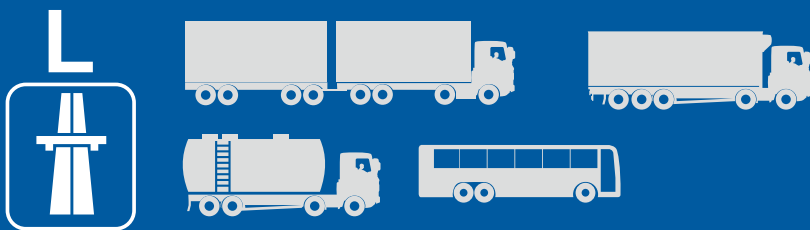

## Long Haul Operation:

- Interstate and Highway
- Long distance routes
- Constant speeds with minimal braking and accelerating
- Well-paved road conditions





# PDL336+



**Drive  
Highway Service**



- **Superior Traction**
- **Longer Mileage**

## Features

- Specially arranged block and sipe angle
- Four belt construction
- Advanced Equal Force Casing technology
- Widened tread width design
- Extended tread depth
- Primewell specially formulated tread compound
- Uniquely designed inter-dependent blocks at tread pattern center

## Benefits

- ▶ Enhanced traction driving performance
- ▶ Increases casing and tread stiffness, minimizing tire deformation for longer wear
- ▶ Uniform force distribution enables optimal tire footprint at various loads level thus result in regular tread wear
- ▶ Large tread volume area for extended wear life
- ▶ Higher tread volume for longer mileage driving capabilities
- ▶ Improved wear resistance of tread
- ▶ Limits block movement, effectively reducing abnormal wear

### SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
12R22.5	18PR	152/149	L	9.00	3550/3250	7830/7160	930/930	135/135	24.0	1096	300	TL



# PTL711



**Trailer  
Highway Service**



## Features

- Extra wide tread
- Four circumferential grooves
- Special tread compound
- Stone ejectors design

## Benefits

- ▶ Extend tread life
- ▶ Ensures even pressure distribution
- ▶ Reduced rolling resistance
- ▶ Prevent stone penetration inside the belt

- **Longer Mileage**
- **Lower Fuel Consumption**

### SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
215/75R17.5	16PR	135/133	J	6.00	2180/2060	4805/4540	860/860	125/125	14.0	767	211	TL
235/75R17.5	16PR	143/141 (144/144)	J(F)	6.75	2725/2575	6005/5675	860/860	125/125	13.5	797	233	TL
265/70R19.5	18PR	143/141	J	7.50	2725/2575	6005/5675	850/850	123/123	13.4	867	262	TL
285/70R19.5	18PR	150/148	J	8.25	3350/3150	7390/6940	900/900	130/130	13.4	895	283	TL



# PTL719



**M+S**

**Trailer  
Highway Service**



## Features

- Extra wide tread
- Four circumferential grooves
- Special tread compound
- Stone ejectors design

## Benefits

- ▶ Extend tread life
- ▶ Ensures even pressure distribution
- ▶ Reduced rolling resistance
- ▶ Prevent stone penetration inside the belt

- **Longer Mileage**
- **Lower Fuel Consumption**
- **Safety**

### SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
245/70R17.5	18PR	143/141	J	7.50	2725/2575	6005/5675	875/875	127/127	13.0	789	248	TL
425/65R22.5	20PR	165	K	12.25	5150	11400	830	120	15.3	1124	422	TL
385/65R22.5	20PR	164/ (158/-)	K(L)	11.75	5000	11000	900	130	15.5	1072	389	TL





# PAL556 PAL556+



**All Position  
Highway Service**



- **Resists Irregular Wear**
- **Longer Mileage**
- **Better in Handling**

## Features

- Four belt construction
- Advanced Equal Force Casing technology
- Wider tread width design
- Primewell specially formulated tread compound
- Resilient four vertical groove and zig-zag bottom design
- Multiple sipes along the side of groove
- Tire casing designed for retreadability
- FEA bead construction optimization concept for bead construction

## Benefits

- ▶ Increases casing and tread stiffness, minimizing tire deformation for longer wear
- ▶ Uniform force distribution enables optimal tire footprint at various loads level thus result in regular tread wear
- ▶ Large tread volume for extended wear life
- ▶ Improved wear resistance of tread
- ▶ Provides better handling and controllability of vehicle
- ▶ Self cleaning capability and higher resistance to damage from road hazards
- ▶ Higher retreadable capabilities
- ▶ Optimizes and uniformly distributes load pressure to the bead, minimizing damage

## SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/ TL
245/70R19.5	18PR	141/140	M	7.50	2575/2500	5675/5510	860/860	125/125	14.0	839	248	TL
275/70R22.5	18PR	148/145 (152/148)	M(J)	8.25	3150/2900	6945/6395	900/900	130/130	15.0	958	276	TL
*295/80R22.5	18PR	152/149	M	9.00	3550/3250	7830/7160	900/900	130/130	15.5	1044	298	TL
315/60R22.5	20PR	154/148	L	9.75	3750/3150	8270/6940	900/900	131/131	13.5	950	313	TL
*11R22.5	18PR	146/143	M	8.25	3250/3000	7160/6610	930/930	135/135	15.3	1054	279	TL
*12R22.5	18PR	152/149	L	9.00	3550/3250	7830/7160	930/930	135/135	15.8	1085	300	TL

\*size only for PAL556+



# PAL517



**All Position  
Highway Service**



## Features

- Wide footprint with wide shoulder design
- Redesigned casing construction
- Low Noise level

## Benefits

- ▶ Designed for usage in both traditional long haul and regional usage conditions
- ▶ Provides an optimized road surface footprint for regular wear and improved mileage
- ▶ Silent and comfortable drive

- **Longer Mileage**
- **Better Driving Comfort**

### SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
8R22.5	14PR	130/128	M	6.00	1900/1800	4190/3970	830/830	120/120	12.9	935	203	TL
9R22.5	14PR	136/134	M	6.75	2240/2120	4940/4675	830/830	120/120	13.8	974	229	TL
10R22.5	16PR	144/142	M	7.50	2800/2650	6175/5840	900/900	130/130	14.8	1019	254	TL



# PAL516+



**All Position  
Highway Service**



- **Excellent Mileage**
- **Outstanding Wear-Resistant**
- **Better handling**

## Features

Wide five-rib tread with Equal Force Casing technology

Special wear-resistant compound

Stone ejectors

Solid shoulder rib

## Benefits

▶ Uniform force distribution enables optimal tire footprint and regular wear

▶ Promotes long wear-resistant performance

▶ Better road hazard protection from stone drilling at groove bottom

▶ For better cornering and handling

## SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
7.00R16	14PR	118/114	M	5.50F	1320/1180	2910/2600	770/770	110/110	11.0	775	200	TL/TT
7.50R16	14PR	122/118	M	6.00G	1500/1320	3305/2910	770/770	110/110	12.0	805	215	TL/TT
8.25R16	16PR	128/124	M	6.50H	1800/1600	3970/3530	770/770	110/110	12.5	855	235	TT





# Regional



## Regional Operation

- Regional highways and city streets
- Flexible in a variety of applications
- Frequent braking, acceleration and turning
- Mainly on paved road, occasional use on unpaved road conditions



# PSR125



**M+S**

**Steer  
Regional Service**



- **Resists Irregular Wear**
- **Longer Mileage**
- **Better in Handling**

## Features

Special high wearing compound and optimized wide footprint derived from Equal Force Casing Technology

High load capacity

Tread sipe organization around grooves

Specialized pattern block layout

Resilient four groove tread design

## Benefits

▶ Extended tire wear life through various operating conditions

▶ Caters to the higher axle weight associated with Euro VI vehicle emission and other regulations

▶ Prevent irregular wear for overall higher mileage

▶ Delivers excellent wet grip performance

▶ Better handling performance and control, with improved damage resistance to road hazards

## SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
295/80R22.5	18PR	154/149	M	9.00	3750/3250	8270/7160	850/850	123/123	16.5	1044	298	TL
315/70R22.5	20PR	158/150 (154/150)	L(M)	9.00	4000/3350	8820/7390	900/900	130/130	15.5	1014	312	TL
315/80R22.5	20PR	158/150 (154/150)	L(M)	9.00	4250/3350	9370/7390	900/900	130/130	16.8	1076	312	TL





# PSR239



**Steer**  
**Regional Service**



- **Resists Irregular Wear**
- **Longer Mileage**
- **Better in Handling**

## Features

Features PTD 3.0 technology, wide tread, deep grooves, large pattern pitch, angled groove wall

Designed with the ISOM simulation platform, Superior stiffness, low deformation, even force distribution, excellent contact

Features CEM patented technology, Long-chain molecule, fine carbon black, high linkage, low heat generation

Features LCT patented curing technology, Precision melt blending, quasi-preparation, detailed molding, stable curing process

## Benefits

- ▶ Excellent tread wear performance
- ▶ Allows for regular wear throughout tire life
- ▶ Delivers resistance to tread wear/tear and reduces overall fuel consumption
- ▶ Provides durable casing, stronger, more flexible and resilient bead and sidewall

## SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
9.00R20	16PR	144/142	K	7.0	2800/2650	6175/5840	900/900	130/130	15.8	1019	259	TT
10.00R20	18PR	149/146	K	7.5	3250/3000	7160/6610	930/930	135/135	16	1054	278	TT
10R22.5	16PR	144/142	M	7.50	2800/2650	6175/5840	900/900	130/130	15.8	1019	254	TL
11R22.5	18PR	149/146	M	8.25	3250/3000	7160/6610	930/930	135/135	16	1054	279	TL
12R22.5	18PR	152/149	M	9.00	3550/3250	7830/7160	930/930	135/135	17.5	1085	300	TL
275/80R22.5	18PR	149/146	M	8.25	3250/3000	7160/6610	900/900	130/130	15.8	1012	276	TL
295/80R22.5	18PR	152/149	M	9.00	3550/3250	7830/7160	900/900	130/130	16.5	1044	298	TL
295/60R22.5	18PR	150/147	L	9.00	3350/3075	7390/6780	900/900	130/130	15	926	292	TL





**PW215**  
**PW215N**



**Steer**  
**Regional Service**



- **Longer Mileage**
- **Better in Handling & Safety**

**Features**

- Big block pattern
- Reinforced bead construction
- Even stress
- Zig-zag grooves and solid shoulder design
- Circumferential rib design

**Benefits**

- ▶ Provide superb resistance to abrasion
- ▶ Provide excellent endurance
- ▶ Provide stable driving and comfortable riding
- ▶ Provide superb anti-skid and anti-abrasion performance
- ▶ Provide reliable direction-handling

**SIZE RANGE**

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
9.00R20	16PR	144/142	K	7.00	2800/2650	6175/5840	900/900	130/130	14.5	1019	259	TT
*11.00R20	16PR	150/147	K	8.00	3350/3075	7390/6780	830/830	120/120	16.5	1085	293	TT

\*size only for PW215N



# PW602



**Drive**  
**Regional Service**



## Features

- Deep lug design
- Optimum tread design
- Central dual serrated elements

## Benefits

- ▶ Excellent traction on wet & dry roads
- ▶ Longer tread life
- ▶ Provides exceptional stability and additional traction

- **Excellent Traction**
- **Longer Mileage**

### SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
315/80R22.5	18PR	154/151 (156/151)	M(L)	9.00	3750/3450	8270/7610	830/830	120/120	17.5	1076	312	TL
11R22.5	16PR	148/145	M	8.25	3150/2900	6940/6395	850/850	123/123	17.2	1050	279	TL





# PW622+



**Drive**  
**Regional Service**



### Features

- Widened tread and deeper depth
- Specific pattern design
- Lug pattern for all-weather

### Benefits

- ▶ Extend tire life
- ▶ Avoid of irregular wear
- ▶ Provide excellent traction

- **Excellent Traction & Safety**
- **Longer Mileage**

#### SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/ TL
315/80R22.5	18PR	156/150 (154/150)	L(M)	9.00	4000/3350	8810/7390	850/850	123/123	23.1	1076	312	TL





**PTR721**



**M+S**

**Trailer  
Regional Service**



**Features**

- Wide central blocks and solid closed shoulder
- Special tread compound

**Benefits**

- ▶ Excellent traction and handling
- ▶ Provides extended tread life

- **Longer Mileage**
- **Better Damage Resistant**

**SIZE RANGE**

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
385/65R22.5	18PR	160/ (158/-)	K(L)	11.75	4500	9920	900	130	15.5	1072	389	TL



# PTR723



**Trailer  
Regional Service**



### Features

- Wide tread design and regular pressure on contact patch
- Special tread compound
- Covexity block design
- Special pattern block and sipe design

### Benefits

- ▶ Excellent mileage and grip performance
- ▶ Good anti-chip/cut performance
- ▶ Better resistance to puncturing and stone-evacuation performance
- ▶ Good grip performance on on/off road

- **Longer Operating Life**
- **Better Damage Resistant**

### SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/ TL
265/70R19.5	18PR	143/141	J	7.50	2725/2575	6005/5675	850/850	123/123	14.5	867	262	TL



# PDR665



**Drive**  
**Regional Service**



- **Superior Traction**
- **Longer Mileage**

## Features

- Specially arranged block and sipe angle
- Four belt construction
- Advanced Equal Force Casing technology
- Widened tread width design
- Extended tread depth
- Primewell specially formulated tread compound
- Uniquely designed inter-dependent blocks at of tread pattern center

## Benefits

- ▶ Enhanced traction driving performance
- ▶ Increases casing and tread stiffness, minimizing tire deformation for longer wear
- ▶ Uniform force distribution enables optimal tire footprint at various loads level thus result in regular tread wear
- ▶ Large tread volume area for extended wear life
- ▶ Higher tread volume for longer mileage driving capabilities
- ▶ Improved wear resistance of tread
- ▶ Limits block movement, effectively reducing abnormal wear

### SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
315/80R22.5	18PR	156/150 (154/150)	L(M)	9.00	4000/3350	8820/7390	850/850	123/123	21.0	1076	312	TL





# PAR558



**All Position  
Regional Service**



- **Longer operating life**
- **Irregular Wear Resistant**
- **Excellent Durability**
- **Damage Resistant**

## Features

- Widened tread width design
- Four belt construction
- Special wear-resistant compound
- Optimal rib ratio and rigidity of tread pattern
- Advanced Equal Force Casing technology
- Big groove wall design and Anti-stone trapping groove bottom
- Shoulder void design and zig-zag longitudinal groove

## Benefits

- ▶ Large tread volume area for extended wear life
- ▶ Effectively optimizes crown stiffness and tire contact surface pressure, promoting long wear life
- ▶ Promotes long wear life
- ▶ Equalizes distribution of tire contact surface pressure, preventing tire from irregular wear
- ▶ Uniform force distribution enables optimal tire footprint at various loads level thus result in regular tread wear
- ▶ Effectively prevents stone trapping, protecting the tire from road hazards
- ▶ Provides effective heat dissipation and better resistance against damages

### SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
8.25R20	16PR	139/137	K	6.50	2430/2300	5355/5070	930/930	135/135	14.0	974	236	TT
9.00R20	16PR	144/142	K	7.00	2800/2650	6175/5840	900/900	130/130	14.5	1019	259	TT
10.00R20	18PR	149/146	K	7.50	3250/3000	7160/6610	930/930	135/135	15.0	1054	278	TT
11.00R20	18PR	152/149	K	8.00	3550/3250	7830/7160	930/930	135/135	15.3	1085	293	TT



# PAR560



**All Position  
Regional Service**



### Features

- New pattern design with wide solid shoulders
- Optimized casing and footprint design
- Specialized tread compound
- Center block pattern design
- New improved bead construction

### Benefits

- ▶ Provides outstanding resistance to irregular wear on shoulder area, while improve handling and driving comfort performance
- ▶ Allows for regular wear throughout tire life, delivering excellent mileage performance
- ▶ Delivers resistance to tread wear and tear, thereby resulting in excellent mileage and longer life
- ▶ Increases traction and braking capabilities in all-position usage
- ▶ Facilitates mounting of tire to rim, improving overall uniformity of tire

- **Excellent Mileage**
- **Outstanding Wear-Resistance**
- **Superior Handling and Driving Comfort**

#### SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
9.5R17.5	16PR	143/141	K	6.75	2725/2575	6005/5675	875/875	127/127	12.5	842	240	TL



# PAR559 PAR559+



**All Position  
Regional Service**



- **Long Operating Life**
- **Durable & Damage Resistant**
- **Irregular Wear Resistant**

### Features

- Special wear resistant compound
- Optimal rib ratio and tread pattern rigidity
- Enhanced bead filler design
- Enhanced shoulder design and zig-zag longitudinal groove
- Unique large groove wall design

### Benefits

- ▶ Promotes excellent wear resistant performance
- ▶ Equalizes distribution of tire contact surface pressure, preventing tire from irregular wear
- ▶ Minimizes flexing, movement, and damage of bead area, improving tire load capability
- ▶ Provides effective heat dissipation and better damage resistance in various road conditions
- ▶ Effectively prevents groove and casing from stone penetration

### SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
*7.00R16	14PR	118/114	L	5.50F	1320/1180	2910/2600	770/770	110/110	11.0	775	200	TL/TT
*7.50R16	14PR	122/118	L	6.00G	1500/1320	3305/2910	770/770	110/110	14.5	805	215	TT
8.25R16	16PR	128/124	M	6.50H	1800/1600	3970/3530	770/770	110/110	14.5	855	235	TT

\*size only for PAR559+





# Mixed Service/Off Road



## Mixed Service Operation

- Frequent use both on and off road
- Heavy Loads
- Construction



# PDM331



**Drive**  
**Mixed Service**



## Features

- Wider tread, with deeper grooves and special compound
- Large block and widened lug groove
- Directional and gradually open lug pattern

## Benefits

- ▶ Improved control and longer tire life
- ▶ Better traction performance in dry and wet conditions
- ▶ Better self-cleaning performance

- **Excellent Traction and Grip**
- **Durability & Long Service Life**

### SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
13R22.5	18PR	154/150 (156/150)	K(G)	9.75	3750/3350	8270/7390	790/790	115/115	23.1	1124	320	TL
295/80R22.5	18PR	152/149	K	9.00	3550/3250	7830/7160	900/900	130/130	22.6	1044	298	TL
315/80R22.5	18PR	156/150	K	9.00	4000/3350	8810/7390	830/830	120/120	23.1	1076	312	TL





# PDM685



**Drive**  
**Mixed Service**



- **Better wear performance & traction**
- **Enhanced durability**

## Features

Bigger central block and tie bar design on shoulder area

Optimized crown and belt traction structure

Specialized bead structure and compound

Strong casing and advanced bonding and building process for bead area

Optimized block pattern and shoulder design

## Benefits

- ▶ Enhanced wear volume and tread rigidity to deliver better wear and traction performance
- ▶ Optimal footprint for improved wear performance
- ▶ Enhances bead durability to reduce damage
- ▶ Enhances bead strength, reduces bead and sidewall damages in mixed service applications
- ▶ Improves pattern rigidity to avoid occurrence of irregular wear and shoulder separation

## SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
11.00R20	18PR	152/149	K	8.00	3550/3250	7830/7160	930/930	135/135	17.0	1085	293	TT
12.00R20	20PR	156/153	K	8.50	4000/3650	8820/8050	900/900	130/130	18.0	1125	315	TT





# PW605



**Drive  
Mixed Service**



## Features

Reinforced Rib Design

Intertwining Tread Pattern with Deeper Grooves

Unique Tread Compound

## Benefits

▶ Enhanced Anti-Puncturing and Anti-Cutting

▶ Exceptional Braking

▶ Excellent Anti-Abrasion Performance

- **Excellent Traction and Grip**
- **Durability & Long Service Life**

### SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
7.00R16	14PR	118/114	K	5.50F	1320/1180	2910/2600	770/770	110/110	14.5	783	200	TT
7.50R16	14PR	122/118	K	6.00G	1500/1320	3305/2910	770/770	110/110	15.0	805	215	TT
8.25R16	16PR	128/124	K	6.50H	1800/1600	3970/3530	770/770	110/110	15.0	855	235	TT
13R22.5	20PR	156/150	K	9.75	4000/3650	8820/8050	930/930	135/135	20.2	1124	320	TL
12.00R24	18PR	156/153	K	8.50	4000/3650	8810/8040	790/790	115/115	20.2	1226	313	TT
12.00R24	20PR	160/156	K	8.50	4500/4000	9920/8820	850/850	123/123	20.2	1226	313	TT
325/95R24	22PR	162/160	K	9.00	4750/4500	10500/9920	850/850	123/123	20.2	1228	325	TL/TT



# PDM608



**Drive  
Mixed Service**



- **Longer Mileage**
- **Heavy Duty**
- **Excellent Traction**

## Features

Wider tread width design and specially formulated tread compound

Strong casing structure realized by strong and thicker cord

Tie-bar design between center blocks

Big block with zig-zag groove design

## Benefits

▶ Delivers longer mileage

▶ Strong casing strength for increase durability and reliability under continuous load stress

▶ Effectively improve pattern rigidity and reduce occurrence of irregular wear

▶ Provides for excellent traction

## SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
9.00R20	16PR	144/142	K	7.00	2800/2650	6175/5840	900/900	130/130	16.8	1019	259	TT
10.00R20	18PR	149/146	K	7.50	3250/3000	7160/6610	930/930	135/135	17.2	1065	278	TT
11.00R20	18PR	152/149	K	8.00	3550/3250	7830/7160	930/930	135/135	18.0	1096	293	TT
12.00R20	20PR	156/153	J	8.50	4000/3650	8820/8050	900/900	130/130	19.0	1136	315	TT
12R22.5	18PR	152/149	L	9.00	3550/3250	7830/7160	930/930	135/135	18.0	1085	300	TL





# PDM325★



**Drive**  
**Mixed Service**



- **Heavy Duty Drive Tire**
- **Stronger Load Capability & Longer Service Life**

## Features

New proven specially engineered bead design, with higher tensile cord and new bonding and building process

Strong casing from higher tensile thicker cord and increase the number of steel cord per inch design

Wear resistant and anti-cut & chip compound

Z-shaped continuous circumference rib

Special tread base compound below tread

## Benefits

▶ Specially engineered to provide strong, flexible and yet resilient bead and sidewall. By doing this, It is able to meet and excel in the load carrying capability that the tire promised to do

▶ Stronger body construction delivers super strong and tougher tire casing durability

▶ Promotes long wear life and resist cut damages

▶ Promote traction for the drive axle

▶ Insulate casing from tread heat thus promotes cooler running

## SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
11.00R20	18PR	152/149	K	8.00	3550/3250	7830/7160	930/930	135/135	18.0	1085	293	TT
12.00R20	20PR	156/153	K	8.50	4000/3650	8820/8050	900/900	130/130	18.0	1125	315	TT





# PDM693



**Drive**  
**Mixed Service**



- **Stronger loading capability**
- **Better damage resistance**
- **Excellent traction**

## Features

- Specially reinforced bead structure with advanced bonding and building process
- Optimized casing profile and four belt structure for better footprint and crown stiffness
- New advanced anti-cut and chip compound with good wear performance
- Wider tie bar design between blocks
- Newly optimized block design with wider tread to enlarge wear volume effectively

## Benefits

- ▶ Stronger bead area for better damage resistant in heavy load operating conditions
- ▶ Provides stronger load capability and promotes heat dissipation for cooler running, while preventing shoulder separation
- ▶ Resists cuts and chips, while delivering good wear performance in severe mixed service applications
- ▶ Ensures tread stiffness and prevent irregular wear
- ▶ Superior traction and enhanced adaptability to complicated road conditions, like mountainous areas

### SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
12.00R20	20PR	156/153	J	8.50	4000/3650	8820/8050	900/900	130/130	21	1136	315	TT



# PAM531 M

**All Position  
Mixed Service**



- **Long Service Life**
- **Outstanding Damage Resistance**

### Features

- ▶ New casing construction with optimized tread profile
- ▶ Combined rib and lug design in the center pattern
- ▶ Solid shoulder design
- ▶ New developed tough anti-cut and chip compound
- ▶ Three zig-zag wide groove with lug

### Benefits

- ▶ Provides an optimal footprint for improved wear-out and thus longer mileage and added vehicle handling experience
- ▶ Provide excellent traction and braking properties in all position usage
- ▶ Improves protection of the casing and added stability and comfort driving experience for drivers
- ▶ High resistance against cut and tearing from normal usage of this tire type on aggressive road surfaces
- ▶ Anti-stone-biting with good water evacuation

### SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
13R22.5	18PR	156/150 (154/150)	K(L)	9.75	4000/3350	8810/7390	875/875	127/127	18.2	1124	320	TL
295/80R22.5	18PR	154/149	K	9.00	3750/3250	8270/7160	850/850	123/123	17.5	1044	298	TL
315/80R22.5	18PR	156/150 (154/150)	K(L)	9.00	4000/3350	8810/7390	850/850	123/123	18.2	1076	312	TL





# PAM872



**All Position  
Mixed Service**



- **Longer mileage**
- **Strengthened loading capability**

## Features

Wide tread and deep groove design with 25% wear volume increase

Optimized four belt structure

New cut and chip resistant compound on tread, combined with low heat build up performance

Reinforced bead structure with advanced bonding and building process

Enhanced casing durability by capability advanced profile technology and inner cord structure

## Benefits

▶ Delivers enhanced wear performance

▶ Even force distribution to ensure good wear performance

▶ Protects tire from cutting, chipping and tearing damages, meanwhile ensure good wear performance

▶ Enhances bead strength to reduce damages from bead separation, bead crack, and bead burst

▶ Improved casing and bead durability to strengthen loading capability and reduce damage

## SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
12R22.5	20PR	154/151	L	9.00	3750/3450	8270/7610	930/930	135/135	17.6	1085	300	TL
13R22.5	20PR	156/153	L	9.75	4000/3650	8820/8050	930/930	135/135	16.5	1124	320	TL





# PAM885



**All Position  
Mixed Service**



- **Better wear performance**
- **Enhanced durability**

## Features

- Wider tread with 5% wear volume increase
- Optimized crown and belt structure
- Specialized bead structure and compound
- Strong casing and advanced bonding and building process for bead area
- Optimized rib pattern and shoulder design

## Benefits

- ▶ Delivers enhanced wear performance
- ▶ Optimal footprint for improved wear performance
- ▶ Enhances bead durability to reduce damage
- ▶ Enhances bead strength, reduces bead and sidewall damages in mixed service applications
- ▶ Improves pattern rigidity to avoid occurrence of irregular wear and shoulder separation

## SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
11.00R20	18PR	152/149	K	8.00	3550/3250	7830/7160	930/930	135/135	16.0	1085	293	TT
12.00R20	20PR	156/153	K	8.50	4000/3650	8820/8050	900/900	130/130	17.0	1125	315	TT



**M+S**

# PW01



**All Position  
Mixed Service**



### Features

- Combination of rib and lug pattern
- Special cut and chip resistant compound
- Strengthened tire compound makeup

### Benefits

- ▶ Excellent traction and maneuverability
- ▶ Provides resistance to cutting & tearing
- ▶ Longer tread life

- **Longer Operating Life**
- **Better Traction & Durability**

### SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
7.00R16	14PR	118/114	M	5.50F	1320/1180	2910/2600	770/770	110/110	11.0	775	200	TL/TT
7.50R16	14PR	122/118	M	6.00G	1500/1320	3305/2910	770/770	110/110	12.5	805	215	TT
8.25R16	14PR	126/122	M	6.50H	1700/1500	3750/3305	670/670	97/97	12.5	855	235	TT
10.00R20	16PR	146/143	K	7.50	3000/2725	6610/6005	830/830	120/120	16.0	1054	278	TT
12.00R20	18PR	154/151	K	8.50	3750/3450	8270/7610	830/830	120/120	14.8	1125	315	TT
11R22.5	16PR	148/145	M	8.25	3150/2900	6940/6395	850/850	123/123	15.8	1050	279	TL
12.00R24	18PR	156/153	K	8.50	4000/3650	8810/8040	790/790	115/115	17.0	1226	313	TT
12.00R24	20PR	160/156	K	8.50	4500/4000	9920/8810	900/900	130/130	17.0	1226	313	TT
315/80R22.5	18PR	154/151 (156/151)	L(K)	9.00	3750/3450	8270/7610	830/830	120/120	16.8	1076	312	TL
315/80R22.5	22PR	161/157	J	9.00	4625/4125	10200/9090	900/900	130/130	16.8	1076	312	TL





**PAM539**  
**PAM539★**



**All Position  
Mixed Service**



• **Heavy Duty All-Position Tire**  
• **Better Damage Resistance & Long Service Life**

**Features**

- Reinforced belt construction
- Strong casing with high tensile and thick cord structure
- Primewell specially reinforced bead structure
- Special groove design in the center and V-shape on the outer groove
- Unique shoulder groove design
- Wear resistance and anti-cut and chip compound
- Optimized rib ratio and high pattern block rigidity

**Benefits**

- ▶ Protects casing from external punctures and delivers strong resistance against tread bursting
- ▶ Strong casing strength for increase durability and reliability under continuous load stress
- ▶ Strong bead for better damage resistance in heavy load operating conditions
- ▶ Prevents and removes groove stone trapping, protecting the tire from road hazards
- ▶ Promotes heat dissipation and therefore cooler running, while preventing shoulder separation
- ▶ Provides optimal wear life and resistant to damage from cuts
- ▶ Effectively improves pattern rigidity and uniform force distribution on the tread, reducing occurrence of irregular wear

**SIZE RANGE**

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/ TL
8.25R20	16PR	139/137	K	6.50	2430/2300	5355/5070	930/930	135/135	14.5	974	236	TT
9.00R20	16PR	144/142	K	7.00	2800/2650	6175/5840	900/900	130/130	15.7	1019	259	TT
10.00R20	18PR	149/146	K	7.50	3250/3000	7160/6610	930/930	135/135	16.2	1054	278	TT
11.00R20	18PR	152/149	K	8.00	3550/3250	7830/7160	930/930	135/135	16.0	1085	293	TT
12.00R20	20PR	156/153	K	8.50	4000/3650	8820/8050	900/900	130/130	16.0	1125	315	TT
12R22.5	18PR	152/149	L	9.00	3550/3250	7830/7160	930/930	135/135	16.0	1085	300	TL
*11.00R20	18PR	152/149	K	8.00	3550/3250	7830/7160	930/930	135/135	16.0	1085	293	TT
*12.00R20	20PR	156/153	K	8.50	4000/3650	8820/8050	900/900	130/130	16.0	1125	315	TT

\*size only for PAM539★





# PAM533



**All Position  
Mixed Service**



**M+S**

- **Longer Service Life**
- **Excellent Durability & Damage Resistant**

## Features

CAD pattern design with multi-angle sipes coupled with Primewell's Equal Force Casing technology to provide optimal footprint with even contact pressure distribution

Large casing profile and low heat generation tread package

Wear resistance tread compound

Resilient three longitudinal zig-zag groove and continuous shoulder rib with step-shoulder void

## Benefits

- ▶ Promote regular wear pattern with stronger resistance to irregular wear, thus extending tire life
- ▶ Promotes cooler running
- ▶ Deliver long lasting tread wear without compromising cutting and chipping
- ▶ Provide good traction in drive position while stronger shoulder rib offer better resistance to side force especially in trailer position

### SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
12.00R24	20PR	160/156	K	8.50	4500/4000	9920/8820	850/850	123/123	15.0	1226	313	TT
325/95R24	22PR	162/160	K	9.00	4750/4500	10500/9920	850/850	123/123	17.0	1228	325	TL/TT



# PAO551



All Position  
Off Road



- **High Traction for Off-Road Usage**
- **Durable & Extended Service Life**

## Features

Reinforced belt construction

Reinforced casing and bead structure

Unique groove width design

Tie-bar design between center blocks

Type-Z shape block pattern design

Anti-Cut and Chip compound developed for mixed conditions of working in the mine and delivers materials out of mine services

## Benefits

- ▶ Protects casing from external punctures and delivers strong resistance against tread bursting
- ▶ Improves durability of casing and bead, increasing damage resistance from heavy load operating conditions
- ▶ Protects tire and groove from stone trapping and offer good self cleaning properties to prevent tire damages
- ▶ Improve block rigidity and prevents pattern blocks from tearing
- ▶ Provides maximum biting edge for excellent traction and braking force
- ▶ Provides excellent protection from tread cuts and chips in aggressive road condition while promote long wear life

## SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/ TL
11.00R20	18PR	152/149	F	8.00	3550/3250	7830/7160	930/930	135/135	24.0	1096	293	TT
12.00R20	20PR	156/153	F	8.50	4000/3650	8820/8050	900/900	130/130	24.0	1136	315	TT





# PAO530



**All Position  
Off Road**



## Features

- Strong casing and shock-resistant robust bead makeup
- Optimized shoulder design formula with reduced shoulder separation
- Design made for navigating unpaved roads
- Lateral grooves with wide angles

## Benefits

- ▶ Protection against blowouts
- ▶ Lowered chance of developing bulges on tire
- ▶ Excellent resistance to punctures, cuts, and tears
- ▶ Outstanding driving performance and self-cleaning abilities

- **High Traction for Off-Road Usage**
- **Durable & Extended Service Life**

### SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
8.25R20	16PR	139/137	F	6.50	2430/2300	5355/5070	930/930	135/135	19.0	986	236	TT
9.00R20	16PR	144/142	F	7.00	2800/2650	6175/5840	900/900	130/130	22.0	1030	259	TT
10.00R20	18PR	149/146	F	7.50	3250/3000	7160/6610	930/930	135/135	22.5	1065	278	TT
11.00R20	18PR	152/149	F	8.00	3550/3250	7830/7160	930/930	135/135	23.0	1096	293	TT
12.00R20	20PR	156/153	F	8.50	4000/3650	8820/8050	900/900	130/130	23.5	1136	315	TT





# PW825+



**All Position  
Off Road**



- **High Traction for Off-Road Usage**
- **Durable & Extended Service Life**

## Features

- Specialized compound with thickened base rubber
- Grooves designed for rough terrains
- Special deepened pattern
- Super strong pattern design
- Wide angle pattern wall design

## Benefits

- ▶ Adverse to damage and puncturing
- ▶ Provide high traction and self-cleaning performance
- ▶ Improves tire life effectively
- ▶ Prevents damage even in tough conditions
- ▶ Good for preventing stone trapping and biting

### SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
11R22.5	16PR	148/145	J	8.25	3150/2900	6940/6395	850/850	123/123	22.6	1050	279	TL
12R22.5	18PR	152/149	F	9.00	3550/3250	7830/7160	930/930	135/135	23.5	1096	300	TL
12.00R24	20PR	160/156	F	8.50	4500/4000	9920/8820	850/850	123/123	31.0	1226	313	TT



# PA0829



**All Position  
Off Road**



- **High Traction for Off-Road Usage**
- **Durable & Extended Service Life**

## Features

- Enhanced bead filler design
- Reinforced sidewall and casing
- Unique groove design
- Tie-bar design between blocks
- Type-Z shape block pattern design
- Anti-Cut and Chip compound

## Benefits

- ▶ Protects bead from external punctures
- ▶ Increases damage resistance from heavy load operating conditions
- ▶ Protects tire and groove from stone trapping and offer good self cleaning properties to prevent tire damages
- ▶ Improves block rigidity and prevents pattern blocks from tearing
- ▶ Provides maximum biting edge for excellent traction and braking force
- ▶ Provides excellent protection from tread cuts and chips in aggressive road condition while promote long wear life

## SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
7.00R16	14PR	118/114	F	5.50F	1320/1180	2910/2600	770/770	110/110	15.5	775	200	TT
7.50R16	14PR	122/118	F	6.00G	1500/1320	3305/2910	770/770	110/110	16.0	805	215	TT
8.25R16	16PR	128/124	F	6.50H	1800/1600	3970/3530	770/770	110/110	16.8	855	235	TT





# Urban

## U



### Urban Operation

- Constant stop and go operating conditions
- Frequent speed changes and turning
- Increased risk of damage from curbing impacts



# PAU561



All Position



**M+S**

### Features

- Enhanced sidewall protector
- Solidified shoulder design
- Wider tread with deepened grooves

### Benefits

- ▶ Shields sidewall against curb and other damage
- ▶ Enhanced cornering stiffness and control
- ▶ Enhanced long life in rough urban conditions


- **Longer Mileage**
- **High Durability**

### SIZE RANGE

Size	PR	Load Index	Speed Rating	Standard Rim	Max load KG	Max load lbs	Max pressure kpa	Max pressure psi	Tread depth (mm)	Outer diameter (mm)	Section Width (mm)	TT/TL
275/70R22.5	16PR	150/145 (154/148)	J(E)	8.25	3350/2900	7390/6395	900/900	130/130	18.7	958	276	TL



# Designations, Load and Speed index

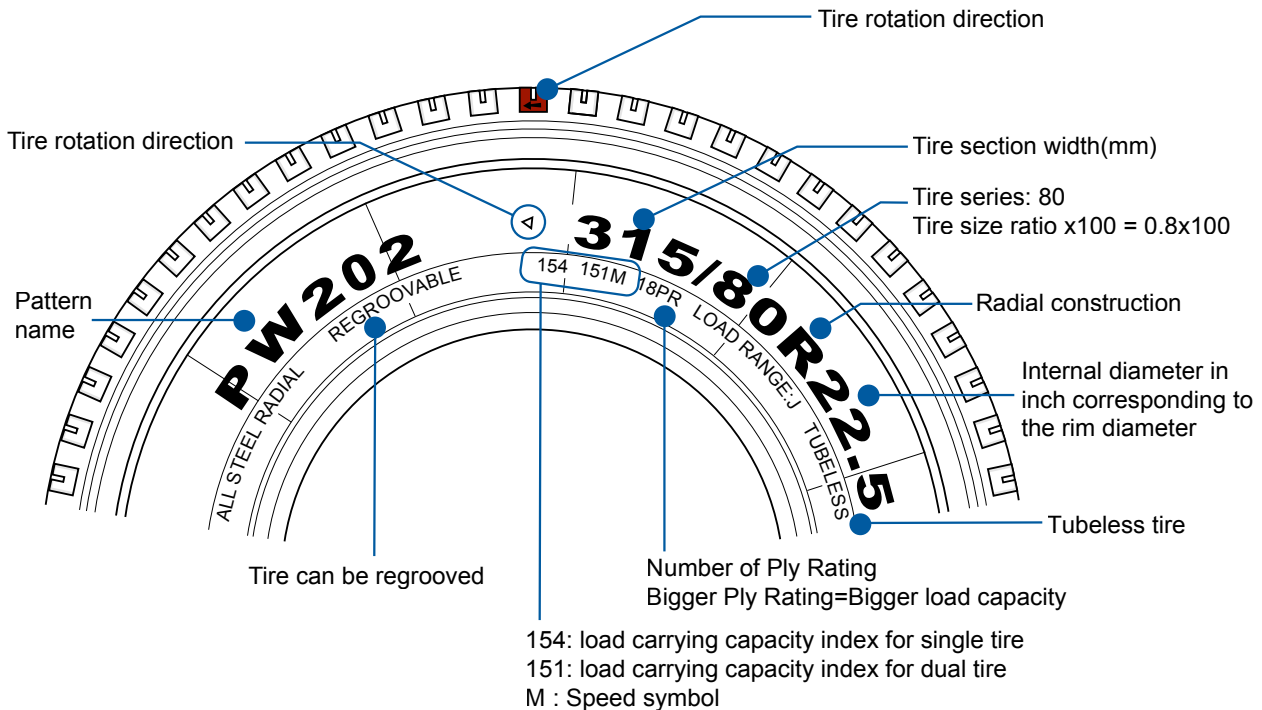

Refer to the Speed Symbols and Load Capacity Index tables below



Before fitting, it is essential to check the different markings to ensure that the tires meet the maximum load and speed possibilities and/or the regulations in force.

Speed symbols

SI	km/h
B	50
C	60
D	65
E	70
F	80
G	90
J	100
K	110
L	120
M	130
N	140
P	150
Q	160
R	170

Load Capacity Index

LI	KG	LI	KG	LI	KG
115	1215	136	2240	157	4125
116	1250	137	2300	158	4250
117	1285	138	2360	159	4375
118	1320	139	2430	160	4500
119	1360	140	2500	161	4625
120	1400	141	2575	162	4750
121	1450	142	2650	163	4875
122	1500	143	2725	164	5000
123	1550	144	2800	165	5150
124	1600	145	2900	166	5300
125	1650	146	3000	167	5450
126	1700	147	3075	168	5600
127	1750	148	3150	169	5800
128	1800	149	3250	170	6000
129	1850	150	3350	171	6150
130	1900	151	3450	172	6300
131	1950	152	3550	173	6500
132	2000	153	3650	174	6700
133	2060	154	3750	175	6900
134	2120	155	3875	176	7100
135	2180	156	4000	177	7300

# Recommendations for the use of PRIMEWELL Truck Tires

## SAFETY


Important instructions for safe inflation



**Tire pressure directly influences tire life and safety**

### Over-inflation reduces:


- Comfort
- Traction
- Braking Efficiency
- Tire life span, particularly on drive axle tires.
- Tread life

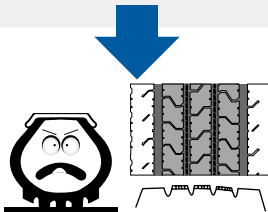

Over-inflation


### Under-inflation leads to:

- Reduced vehicle handling and safety
- A reduction in casing retreadability
- An increase in rolling resistance and fuel consumption
- Heat build-up

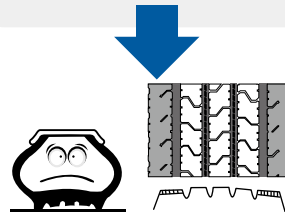

Under-inflation

Effect of inflation pressure on tire life

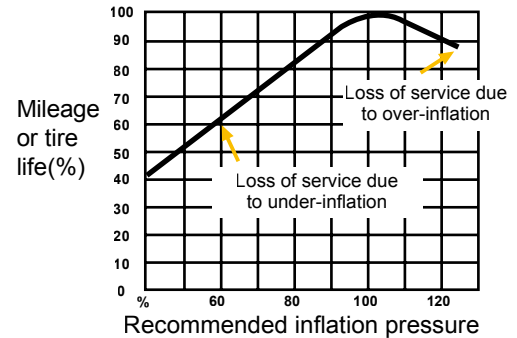

## ADVICE BEFORE INFLATION

- 1 Weigh your vehicle and its load, axle by axle, to determine tire pressure.
- 2 Measure the pressure when cold (when the vehicle has been stationary for several hours); pressures must be checked at regular intervals and during each service.
- 3 Important safety instruction: pressure increases when the vehicle is in motion, never reduce the pressure of a hot tire.
- 4 Pressure gauges: must be accurate, handled with care and calibrated regularly.



### Caution:

Driving with insufficient pressure can damage your tires. After having driven with a severely underinflated tire, do not re-inflate tires: have your tires fully checked over by an expert.



**PRIMEWELL**

[www.primewell.com](http://www.primewell.com)